



DOT/TC STAMPING LAYOUT

(NOT TO SCALE)  
CHARACTER HEIGHT:  
5/16"

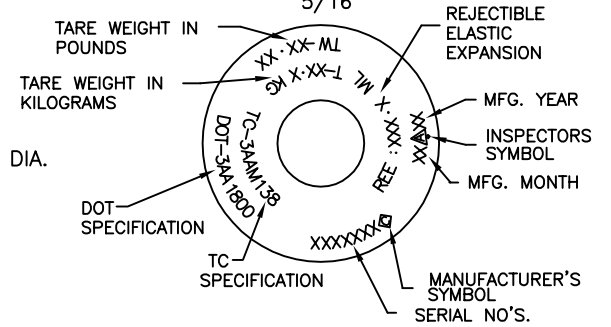

DOT STAMPING LAYOUT

(NOT TO SCALE)  
CHARACTER HEIGHT:  
5/16"

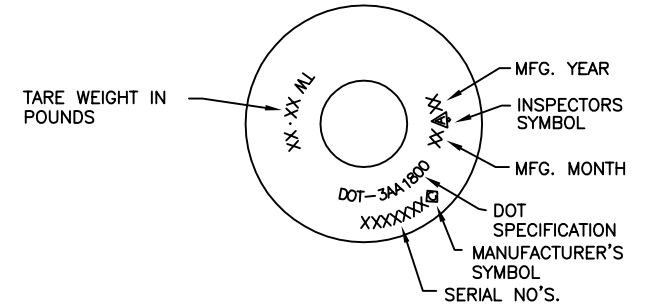

SPECIFICATION	DOT-3AA	TC-3AAM
WEIGHT	39.0 LBS NOM	17.69 Kg NOM
VOLUME	868 CU IN NOM	14.22 L NOM
SERVICE PRESSURE	1,800 PSIG	138 BARS
TEST PRESSURE	3,000 PSIG	20.7 MPa

**CONFIDENTIAL**  
**DO NOT DUPLICATE**

**NON-CONTROLLED DOCUMENT**  
**QA/PC DEPARTMENT**  
**REFERENCE ONLY**

- MATERIAL: NORRIS BILLET
- INTERNAL CLEANING: ALKALINE-STEAM-NITROGEN PURGE
- EXTERNAL FINISH: SHOTBLAST  
PAINT PER WORK ORDER
- PACKAGING: PLUG INLET WITH 3/4" NPT PLUG (5743)  
RUBBER BAND / PALLETIZE / STRETCH WRAP

NOTES:

1. NECKRING - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS CAP THREAD X 1 5/8 BORE X 1 7/8 HIGH, UNEMBOSSED NECKRING PART NUMBER, (4004).
2. CAP - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS THREAD PART NUMBER 5772.

REV	DESCRIPTION		BY	DATE
	UNITS INCHES (mm)		HUNTSVILLE FACILITY 521 GREEN COVE ROAD HUNTSVILLE, AL 35803 USA	
	TOLERANCES (EXCEPT NOTED)			
DRWN. D. HARRIS	DECIMAL ± .01	TITLE 20 LB CO <sub>2</sub> CYLINDER		
CHKD. DLH 12/20/11	ANGULAR ± 1 DEG	DATE 12/20/11	DRAWING NUMBER 3740725-00	
APPD. FW 12/20/11				
SCALE NONE				